


Angular contact ball bearing

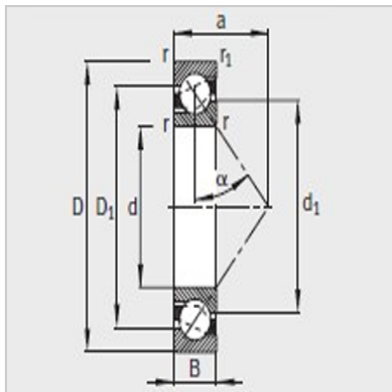

Bearing code (2) :

single column :	7240A
Paired Double 1 :	7240ADB
Paired Double 2 :	7240ADF

Overall dimensions :

d :	200
D :	360
B :	58
Minimum r :	4
R ₁ (minimum) :	1.5

Rated load (N) :

Cr :	335000
Cor :	450000
Coefficient fo :	15.5

Extreme speed (1) (rpm) :

grease lubrication :	1500
oil lubrication :	2000

Location of action point (mm) :

a :	109.8
-----	-------

Installation size (mm) :

D _a (minimum) :	218
Da (maximum) :	342
R _a (maximum) :	3

Rated load (paired double type) (N) :

Cr :	550000
Cor :	900000

Paired twin limit speed (1) (rpm) :

grease lubrication :	1200
oil lubrication :	1600

Paired double type action point distance a0 (mm) :

Back-to-back configuration :	219.6
------------------------------	-------

Face to face configuration :	103.6
---------------------------------	-------

Paired double installation size (mm) :

$D_b(3)$ (minimum) :	-
D_b (maximum) :	351
$R_b(3)$ (maximum) :	1.5

Weight (kg) :

Reference :	26.5
-------------	------

: