


Angular contact ball bearing

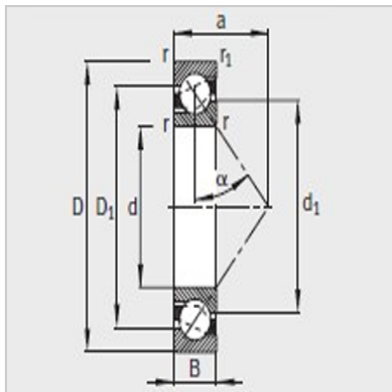

Bearing code (2) :

single column :	7340A
Paired Double 1 :	7340ADB
Paired Double 2 :	7340ADF

Overall dimensions :

d :	200
D :	420
B :	80
Minimum r :	6
R <sub>1</sub> (minimum) :	2

Rated load (N) :

Cr :	475000
Cor :	660000
Coefficient fo :	14.5

Extreme speed (1) (rpm) :

grease lubrication :	1300
oil lubrication :	1800

Location of action point (mm) :

a :	129.5
-----	-------

Installation size (mm) :

D <sub>a</sub> (minimum) :	222
Da (maximum) :	398
R <sub>a</sub> (maximum) :	4

Rated load (paired double type) (N) :

Cr :	770000
Cor :	1320000

Paired twin limit speed (1) (rpm) :

grease lubrication :	1100
oil lubrication :	1400

Paired double type action point distance a<sub>0</sub> (mm) :

Back-to-back configuration :	259
------------------------------	-----

Face to face configuration :	99
---------------------------------	----

Paired double installation size (mm) :

$D_b(3)$ (minimum) :	-
$D_b$ (maximum) :	410
$R_b(3)$ (maximum) :	2

Weight (kg) :

Reference :	54.4
-------------	------

: