


Angular contact ball bearing

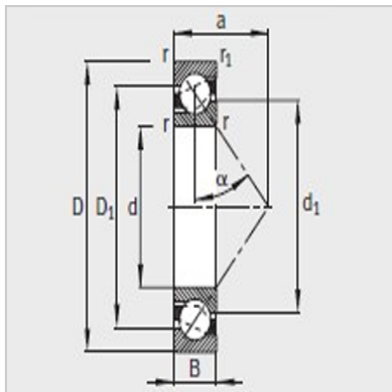

Bearing code (2) :

single column :	7340B
Paired Double 1 :	7340BDB
Paired Double 2 :	7340BDF

Overall dimensions :

d :	200
D :	420
B :	80
Minimum r :	5
R ₁ (minimum) :	2

Rated load (N) :

Cr :	430000
Cor :	600000
Coefficient fo :	15

Extreme speed (1) (rpm) :

grease lubrication :	1200
oil lubrication :	1600

Location of action point (mm) :

a :	170.1
-----	-------

Installation size (mm) :

D _a (minimum) :	222
Da (maximum) :	398
R _a (maximum) :	4

Rated load (paired double type) (N) :

Cr :	700000
Cor :	1200000

Paired twin limit speed (1) (rpm) :

grease lubrication :	950
oil lubrication :	1300

Paired double type action point distance a₀ (mm) :

Back-to-back configuration :	340.1
------------------------------	-------

Face to face configuration :	180.1
------------------------------	-------

Paired double installation size (mm) :

$D_b(3)$ (minimum) :	
----------------------	--

D_b (maximum) :	410
-------------------	-----

$R_b(3)$ (maximum) :	2
----------------------	---

Weight (kg) :

Reference :	55.3
-------------	------

: